


Commercial offer for the supply of ventilation curtain systems (APH-CRD series)

ACTTECH Sp. z o.o. offers ventilation curtains of its own production of **APH-CRD-Start series**, equipped with windproof stands, windproof netting and manual drive mechanisms

Scheme of the curtains of APH-CRD-Start series windproof stands

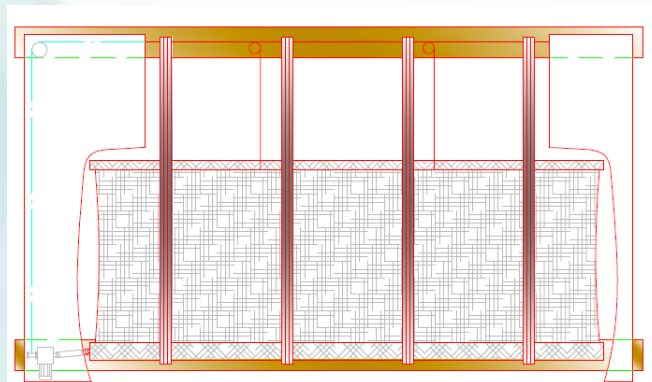

- Opening mode of the curtains – from top to bottom
- Winding system with drive shaft (canvas is connected to pipes by means of its fastening in a special groove of tubes for equable twisting, preventing folds and tears).
- All pipes are made of aluminum (we don't use galvanized steel).
- The system of transparent curtains is equipped with extreme end boxes, thus preventing blowing in of wind/snow/rain.





info@acttech.pl

+48 739 078 069

- Woven polyethylene



- Made in Germany
- Material – high-quality synthetic fabric, woven polyethylene laminated on both sides
- Density – 320 gr/m^2 .
- Operating temperature range – from -40°C do $+80^\circ\text{C}$.
- UV radiation resistant .
- Transparent.
- Tensile strengths – 1100 N/5cm

- Plastic netting



- Made in Italy .
- Dual purpose – reduction of draft and protection from birds
- Material – high strengths polypropylene
- Mesh size– $22 \times 35 \text{ mm}$.
- Weight 1 m^2 . – 70 gr/m^2 .
- Color – black.

- Windproof stands



- Made of aluminum profile .
- Equipped with rubber dumper to prevent canvas from wear and tear and to reduce noise.
- Equipped with brackets, providing adjustment of the gap between the canvas and stands .
- Installation inside and outside of the opening .
- Step– $1,5 \text{ m}$.
- Do not require adjustments in the process of exploitation .

- Stainless steel wire rope.

